

FK11R-25T




FK11R-25T

Total Weight:	4000kg
Rated capacity:	2.5 ton
rated power:	36.8/2500kw/rpm

Customizable



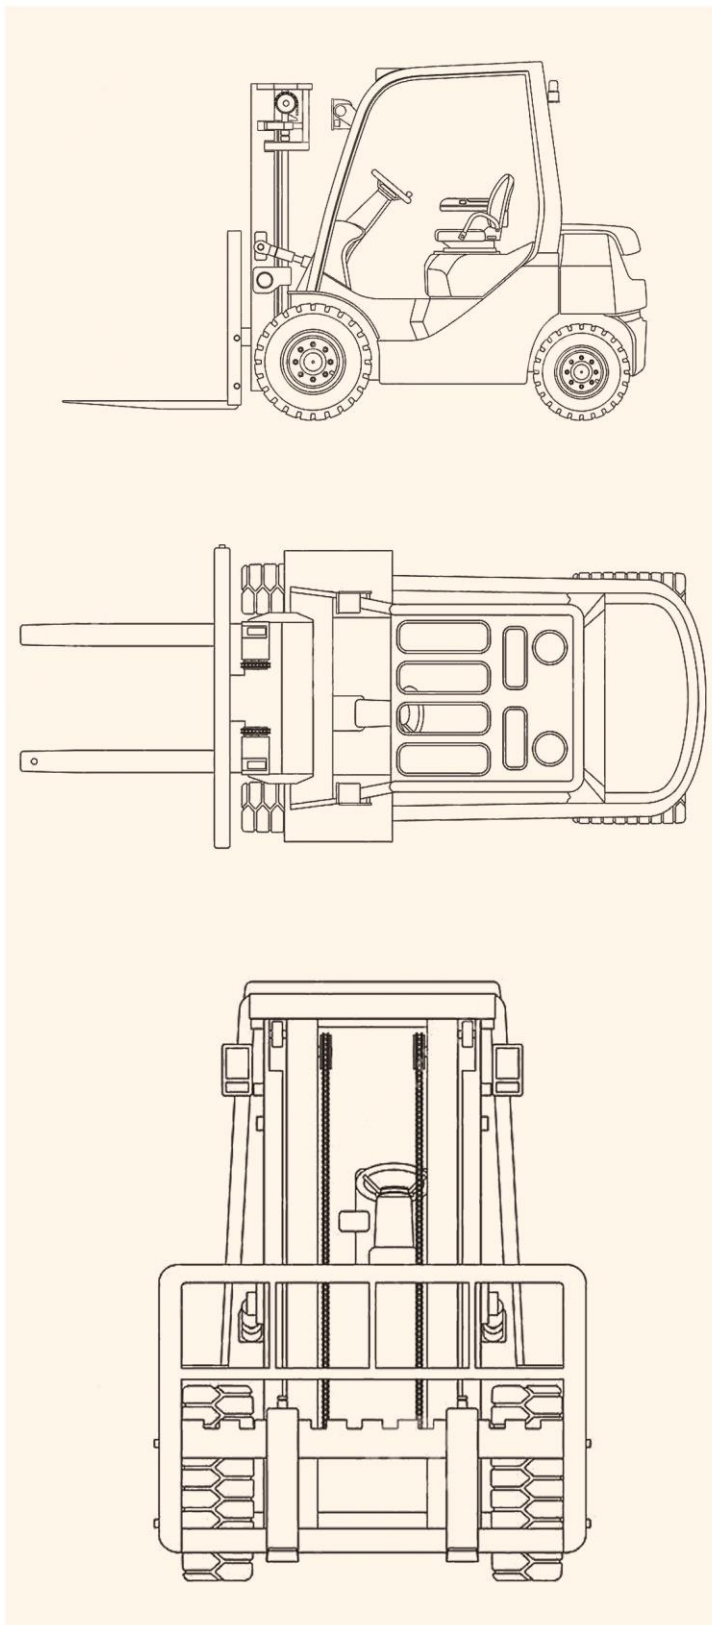

► Technical specifications

Basic parameters

Rated capacity:	2.5 ton
Total Weight:	4000 kg
Load center:	500

Performance parameter

Lift height:	3000
Free lift height:	130
Fork size(L*W*T):	1070×120×40
Fork outside spread(Min./Max.):	300/1200
Front overhang:	482
Mast lowered height:	2095
Mast extended height:	4050
Overhead guard height:	2120

Job parameters

Turning radius:	2380
Min. right angle aisle width:	2000
Travel speed (unload/full load):	20/18.5
Lift speed (unload/ full load):	480
Max. gradeability:	20
Front wheel:	7.00-12-12PR
Rear wheel:	6.00-9-10PR

Length to face of fork

Without of fork:	2630
With fork:	3720
Wheel width:	1150

Other parameters

Wheel base:	1650
Engine Rated output:	31.2/2250
Engine Rated torque:	143.7/1800
Engine Displacement:	2065
Engine No. of cylinder:	4
Engine Bore×stroke:	89*83
Shift (FWD/RVS):	2/2
Operating pressure:	17.5
Transmission Model:	Hydraulic

安徽福客重工有限公司
Anhui Fuke Heavy Industry Co., Ltd.

website: <https://construction-equip.com>
whatsapp: +8613505697380
Address: Room 405, Building B-4, East Side
of Dazhong Road, Cuozhen Town, Feidong
County, Hefei City, Anhui Province

whatsapp: +8613505697380

Email: fuke7380@gmail.com