



FK-599



Basic Configuration

Bucket capacity

1.5m³

Operation weight

9000kg

Rated load

3000kg

Wheel base

2450mm

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.


Anhui Fuke Heavy Industry Equipment Co., Ltd.

Web: www.fukeonline.com

Basic Parameters

Length(with bucket on ground):6650±80mm
Overall width(at stabilizer):2500±20mm
Load Bucket width:2400mm
Height(To the top of the cab):3120±10mm
Height(To the top of the digging pole):3940 ±20mm
Wheel base:2450±10 mm
Wheel tread:2139 ±10mm
Rated load:3000KG
Operating weight:9000kg
Rated bucket capacity:1.5m ³
Max. dump clearance:3100±50 mm
Dump reach:870±20 mm
Rated digging bucket capacity:0.35m ³
Max. digging depth:4100±20 mm
Optional digging depth (telescopic digging boom):5300+20mm
Max. digging radius:5345±20mm
Max. dumping height :3740±20mm
Max. Digging Height:5470 ±20mm
Lifting force at Max. digging radius:1220kg
Diesel engine Model:YUCHAI YCD4J22T-115
Type:Water-cooling
Rated output:85 (kW)
Optional engine:CUMMINS 4BT3.9-C100
Gearbox type:Synchromesh mechanical shift

Loader Outline

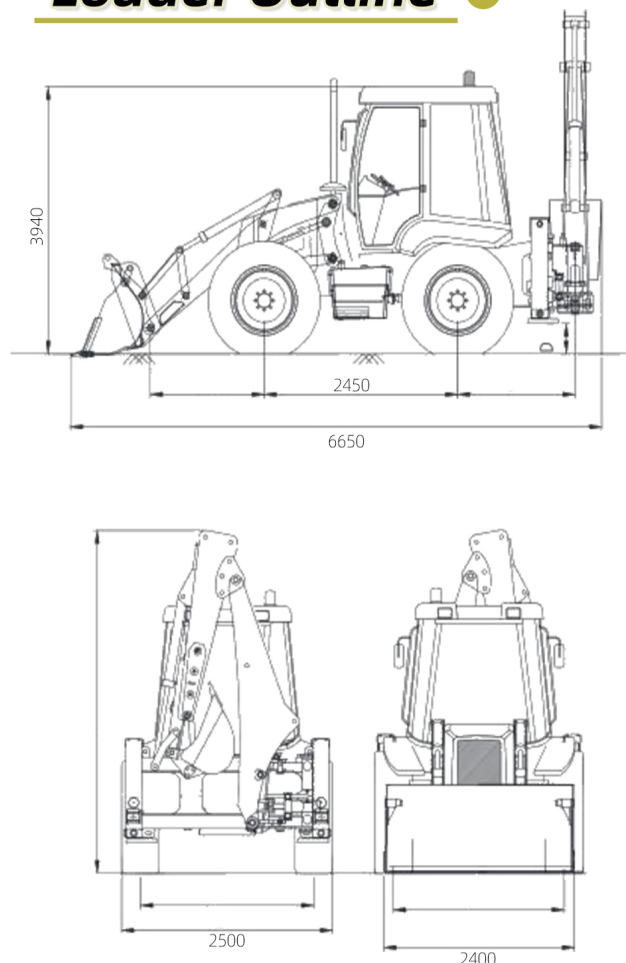

Accessories



*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Contact us:

Sun Xianfeng - Phone/Whatsapp:+8613505697380 |

Email:fk002@fukebn.com/fuke7380@gmail.com |

Mr.Zhang - Phone/Whatsapp:+8613291848418 | Email:zh@fukebn.com

Web:

www.fukeonline.com

