

FK FUKU 福客®

FK-203T

**DO IT
TODAY**




Basic Information

Operating weight
3000kg

Rolling width
1200mm

Engine power
28.5KW


Exciting force
32KN

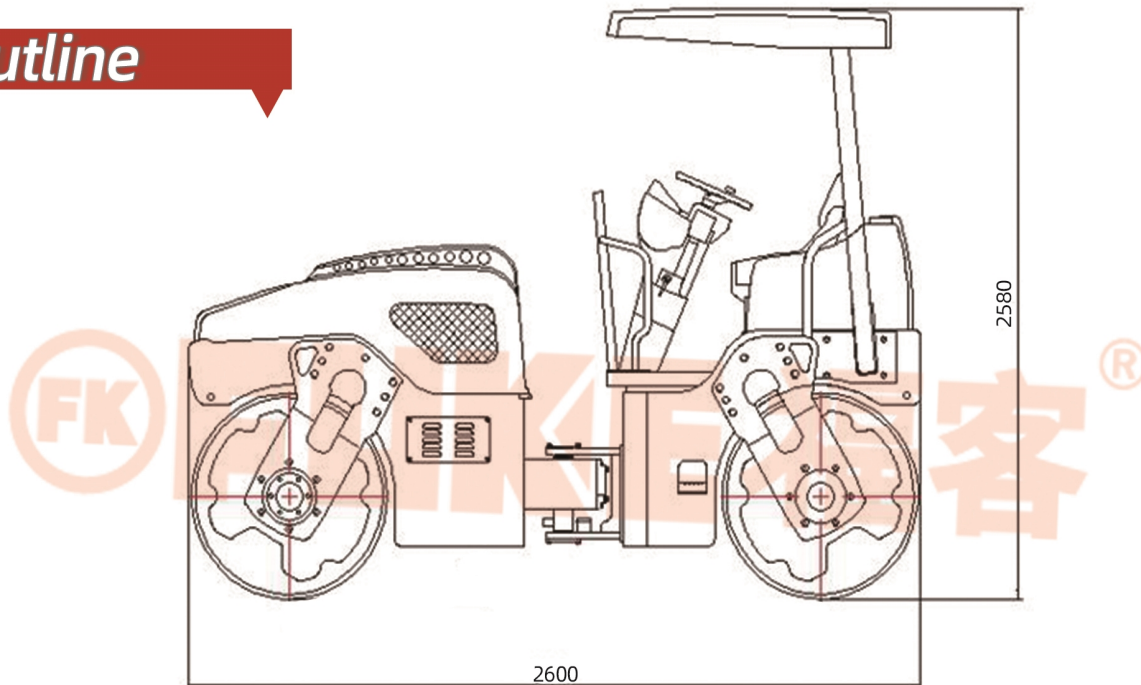

Technical Specification

Operating Weight	3000 kg
Rolling width	1200 mm
Vibration frequency	65 HZ
Theoretical amplitude of vibration	0.5 mm
Exciting force	32 kN
Travel speed	0-12 km/h
Engine model	ZN390B
Rated rotation speed	2000 r/min
Rated power	140 kw
Overall dimensions L*W*H	2600×1320×2580 mm

- ★Hydraulic double drum drive, infinitely variable speed.
- ★Hydraulic double drum vibration, electronic controlled starting of vibration, great exciting force with good compaction performance.
- ★Hydraulic steering, articulated frame with flexible operation.
- ★Equipped with electronic control pressurized water spraying system, high volume anti-corrosive water tank.
- ★Hydraulic service brake, electronic self-locking parking brake, safe and reliable.
- ★The front cover can be turned up in a big angle for easily maintenance.
- ★Equipped with imported famous brand hydraulic components with reliable performance.

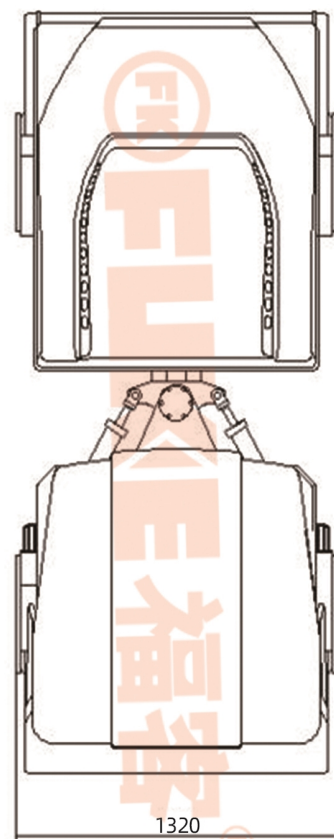

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

