FUKE福客®

FK-214D

Basic Information

Operating weight
14000kg

Rolling width
2130mm

Gradeability
30%

Activating force
295/145KN

Rated power
82KW

Rated rotary speed
2000r/min

Outline

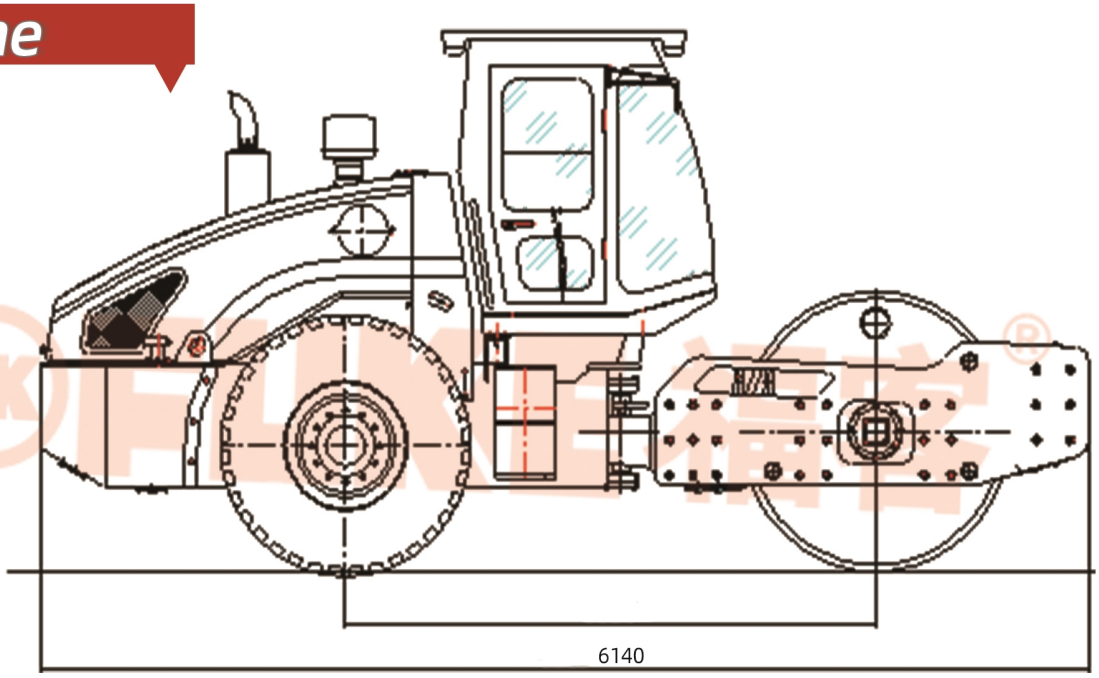

Technical Specification

Operating weight	14000 kg
Diameter of vibrating drum	ϕ1500 mm
Rolling width	2130 mm
Activating force	295/145 KN
Vibration frequency	30 Hz
Theoretical amplitude of vibration	1.8/0.9 mm
Moving speed Range I II III	2.0/5.0/10.5 km/h
backward I II	2.0/5.0 km/h
Gradeability	30%
Diesel engine model	WP4G110E221
Rated rotation speed	2000 r/min
Rated power	82 kw
Overall dimensions L W H	6140×2280× 3080 mm

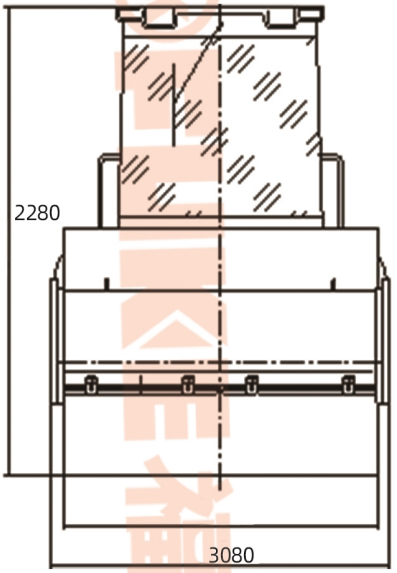

★Mechanical drive, three-speed gear shift. Hydraulic vibration, start-vibration by electric control, hydraulic steering with light operation.

★Adopt the special gear-box with synchronizer, easy to operate and comfortable.

★Streamlined shape design with the whole removable cover, easy to maintenance.

★This roller has super compaction performance. Double amplitude applies for different stage compaction works. This system also has the function of delayed transition and stable transition of amplitude.

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE
Anhui Fuke Heavy Industry Equipment Co., Ltd.
Contact us:
Phone/Whatsapp:+8613505697380
Email:fk002@fukebn.com/fuke7380@gmail.com